



mod. **Easy**



UNITÀ INTERNE PER MULTI-SPLIT



Optional



Optional

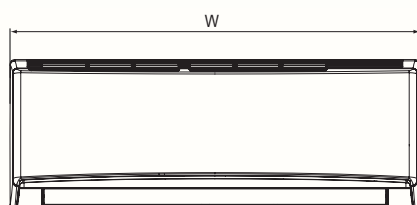

WIFI OPZIONALE

Codice Evaporante Fintek			MiW9000ES	MiW12000ES	MiW18000ES	MiW24000ES
Codice Evaporante Midea			MSAGBU-09HRFN8/WR	MSAGBU-12HRFN8/WR	MSAGCU-18HRFN8/WR	MSAGDU-24HRFN8/WR
Alimentazione elettrica		F-V-Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz
Raffreddamento	Capacità	kW (Nom)	2,64	3,52	5,28	7,03
Riscaldamento	Capacità	kW (Nom)	2,93	3,81	5,57	7,33
Unità Interna	Dimensioni (L-P-A)	mm	835-208-295	835-208-295	969-320-241	1083-336-244
	Portata Aria (Min-Med-Max)	m3/h	300-360-510	310-370-520	500-600-800	610-770-1090
	Pressione Sonora (Min-Med-Max)	dB(A)	21-22-29-37	21-22-33-38	20-31-37-41	21-34-37-46
	Potenza Sonora (Max)	dB(A)	56	60	56	62
Dimensioni tubazioni di collegamento	Tubazione Lato Liquido	mm	6,35	6,35	6,35	9,52
	Tubazione Lato Gas	mm	9,52	9,52	12,7	15,88
Dati elettrici	Potenza Elettrica Assorbita Massima	W	36	36	40	50
	Corrente Massima	A	0.2	0.2	0.2	0.2
Limiti Operativi	Temperature Interne	Raff.(Min-Max) °C B.U.	+16 - +32	+17 - +32	+17 - +32	+17 - +32

* misurata ad un metro con tubazione isolata fonosorbente inserita



SLEEP COMFORT
MODE



COLD AIR
PREVENTION



LED



TIMER



SMART DEFROST



X-FAN



"TURBO" FUNCTION



SELF DIAGNOSIS



DEHUMIDIFICATION



AUTO RESTART
MEMORY



3D AIRFLOW



SINGLE/MULTI



MIN. TEMP. HOT



MIN. TEMP. COLD



QUIET DESIGN



IFEEL



ENERGY SAVING



COLD PLASMA



WIFI CONTROL



WIRED CONTROLLER
(OPTIONAL)



DOOR CONTROL
(OPTIONAL)