



mod. Fast



UNITÀ INTERNE PER MULTI-SPLIT



Optional



Optional

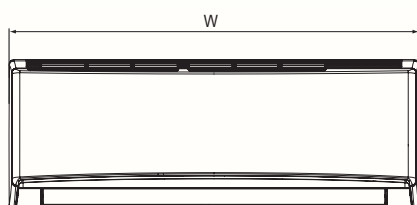

WIFI OPZIONALE

Codice Evaporante Fintek			MiW7000FA	MiW9000FA	MiW12000FA	MiW18000FA	MiW24000FA
Codice Evaporante Midea			MSAGXAU-07HRDN8	MSAGXAU-09HRDN8	MSAGXBU-12HRDN8	MSAGXCU-18HRFN8	MSAGXDU-24HRFN8
Alimentazione elettrica	F-V-Hz		Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz
Raffreddamento	Capacità	kW (Min-Nom-Max)	2,05	2,64	3,52	5,28	7,03
Riscaldamento	Capacità	kW (Min-Nom-Max)	2,34	2,93	3,81	5,57	7,33
Unità Interna	Dimensioni (L-P-A)	mm	726-210-291	726-210-291	835-208-295	969-320-241	1083-336-244
Portata Aria (Min-Med-Max)		m ³ /min	330-460-520	330-460-520	350-400-530	500-600-800	610-770-1090
Pressione Sonora (Si-Min-Med-Max)		dB(A)	20-22-32-37	20-22-32-37	21-22-32-37	20-31-37-41	21-34-37-46
Dimensioni tubazioni di collegamento	Tubazione Lato Liquido	mm	6,35	6,35	6,35	6,35	9,52
Tubazione Lato Gas		mm	9,52	9,52	9,52	12,7	15,88
Dati Elettrici	Potenza Elettrica Assorbita Massima	W	40	40	40	50	60
	Corrente Massima	A	0,2	0,2	0,2	0,2	0,3
Limiti Operativi	Temperature Interne	Raff.(Min-Max) °C B.U.	+17 - +32	+17 - +32	+17 - +32	+17 - +32	+17 - +32

* misurata ad un metro con tubazione isolata fonossorbente inserita



SLEEP COMFORT
MODE



COLD AIR
PREVENTION



LED



TIMER



SMART DEFROST



X-FAN



"TURBO" FUNCTION



SELF DIAGNOSIS



DEHUMIDIFICATION



AUTO RESTART
MEMORY



3D AIRFLOW



SINGLEMULTI



MIN. TEMP. HOT



MIN. TEMP. COLD



QUIET DESIGN



IFEEL



ENERGY SAVING



COLD PLASMA



WIFI CONTROL



WIRED CONTROLLER
(OPTIONAL)



DOOR CONTROL
(OPTIONAL)