





CANALIZZATO

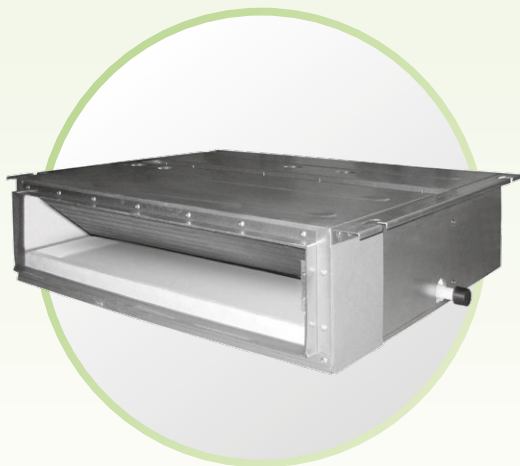

Optional

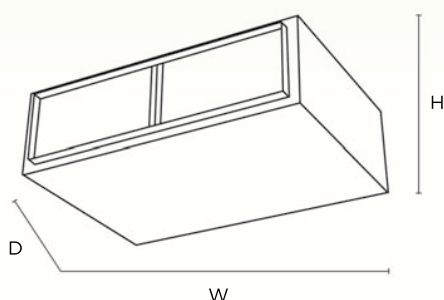

Optional

Codice Fintek	Codice Evaporante Fintek	MICK07DK	MICK09DK	MICK12DK	MICK18DK	MJCK18DK-V	MICK24DK	MJCK24DK-V
Codice Prodotto Midea	Codice Evaporante Midea	MTIU07-HWFX(-GA)	MTIU-09HWFX(-GA)	MTIU-12HWFX(GA)	MTIU-18HWFX(GA)	MTJ-18HWFX(GA)	MTIU-24HWFX(-GA)	MTJ-24HWFX(GA)
Alimentazione elettrica	F-V-Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz
Raffreddamento	Capacità	kW (Nom)	2,05	2,63	3,52	5,28	5,28	7,03
Riscaldamento	Capacità	kW (Nom)	2,34	2,93	3,81	5,57	5,57	7,51
Unità Interna	Dimensioni (L-P-A)	mm	700-506-200	700-506-200	700-506-200	880-674-210	880-674-210	1100-774-249
Peso netto		Kg	17,8	17,8	17,8	24,4	24,4	32,3
Dimensioni Imballo (L-P-A)		mm	860-540-285	860-540-285	860-540-285	1070-725-280	1070-725-280	1305-805-315
Peso lordo		Kg	21,5	21,5	21,5	29,6	29,6	39,1
Portata Aria (Min-Med-Max)		m ³ /h	230-340-500	230-340-500	300-480-600	515-706-911	515-706-911	825-1035-1229
Pressione ventilatore nominale		Pa	25	25	25	25	25	25
Pressione ventilatore campo di regolazione		Pa	0-40	0-40	0-60	0-100	0-100	0-125
Pressione Sonora (Silent-Min-Med-Max)			23-29-31-35	23-29-31-35	23-29-31-35	26-34-38-41	26-34-38-41	27-37-40-42
Dimensioni tubazioni di collegamento	Tubazione Lato Liquido	dB(A)	6,35	6,35	6,35	6,35	6,35	9,52
Tubazione Lato Gas		dB(A)	9,52	9,52	9,52	12,7	12,7	15,88
Limiti Operativi	Temperature Interne	Raff. (Min-Max) °C	+16 - +32	+16 - +32	+16 - +32	+16 - +32	+16 - +32	+16 - +32
		B.U. Risc. (Min-Max) °C	0 - +30	0 - +30	0 - +30	0 - +30	0 - +30	0 - +30
		B.S.						



SLEEP COMFORT MODE



MIN. TEMP. HOT



MIN. TEMP. COLD



TIMER



SMART DEFROST



ONLY MULTISPLIT



SELF DIAGNOSIS



DEHUMIDIFICATION



AUTO RESTART MEMORY



INTEGRATED CONDENSATE DRAIN PUMP



EASILY REMOVABLE FILTERS FOR CLEANING



WIRED CONTROLLER (OPTIONAL)